

Two-side labeling


Do format changes
still take up
too much of
your time?



Two-side labeling

The 362C can be converted in an instant

The compact machine for two-side labeling operates largely without format parts, allowing for quick and easy changeovers to different product formats. Two high-performance applicators with a pivot peel plate deliver performance and precision. And labeling speed is not only one of the 362C's defining characteristics – thanks to its modular design, delivery is also especially fast. If required, it can also easily be converted to wrap-around labeling, giving users even more application options.

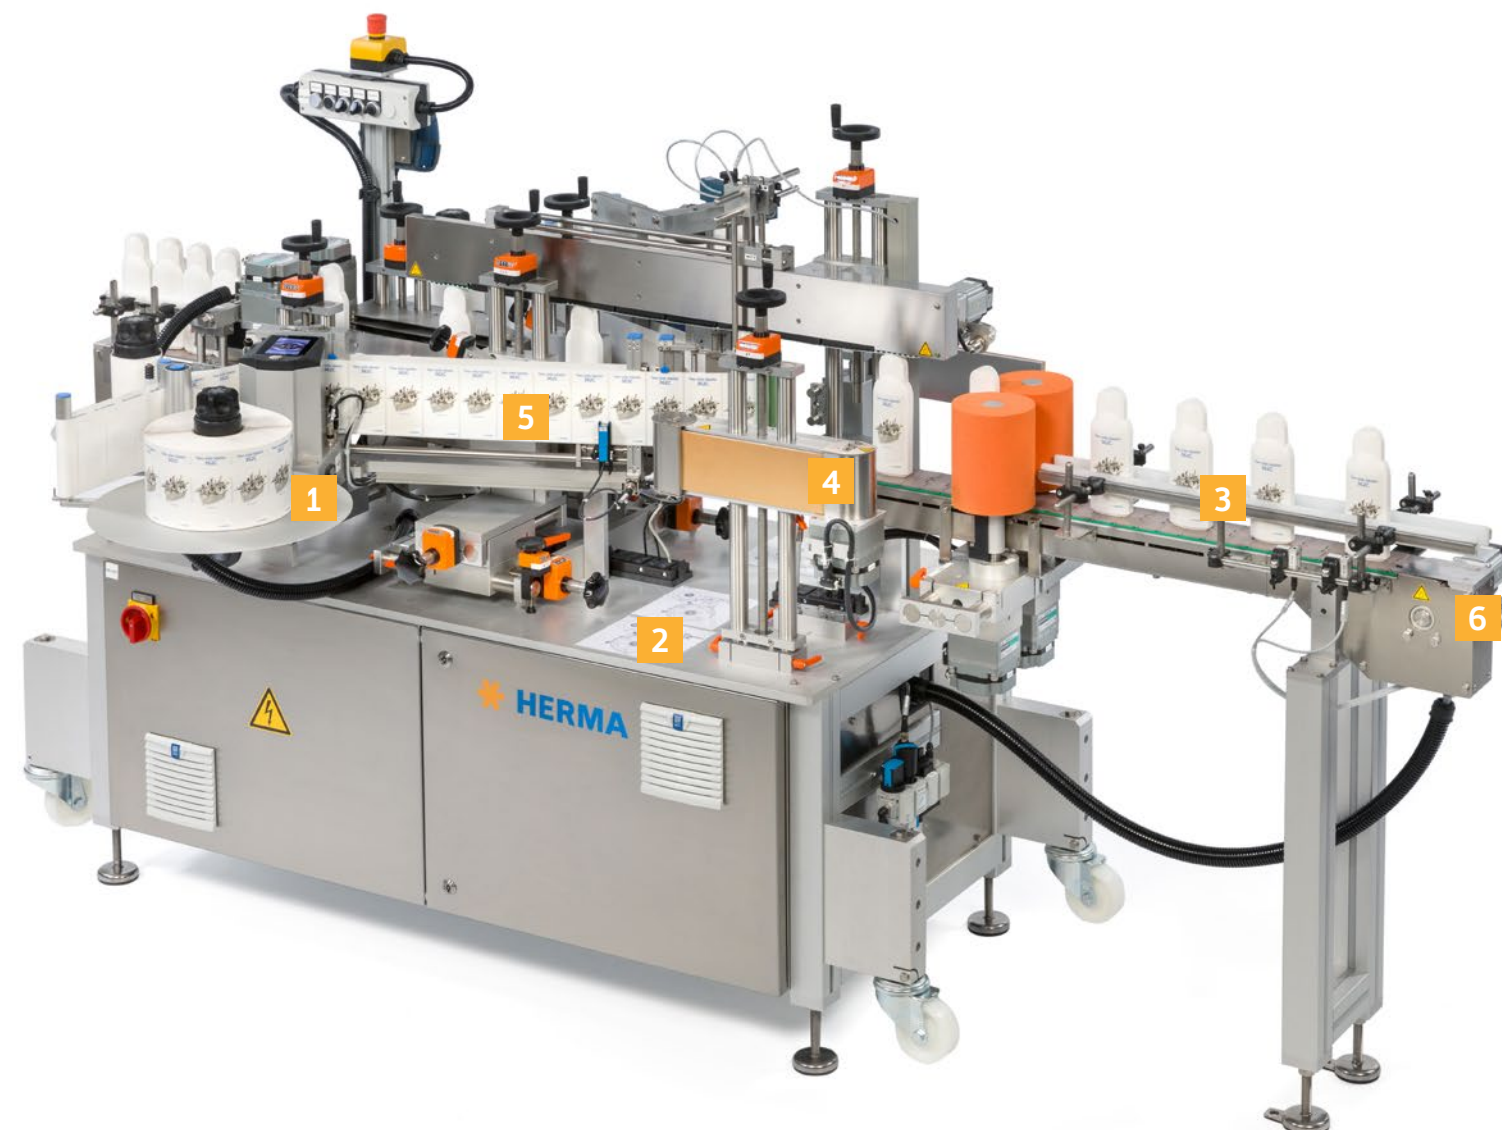

Best results

Thanks to the high-performance applicators of HERMA the 362C has sufficient reserve capacities while going easy on the investment budget.



With a very compact design it is well-suited even for difficult assembly situations.



Despite largely requiring no format parts it covers a very wide spectrum of product formats.



Useful options

The machine can be converted to wrap-around labeling in little time.



Hot-foil or thermal transfer printers can be easily integrated in order to print variable data.




The conveyor is available with a belt or slats, length 2,160, 2,660 or 3,160 mm.



Technical data

Labeling type:	Two-side labeling • wrap-around labeling (optional)
Product specifications:	Rectangular, flat-arched to oval, cylindrical, free-standing
Product dimensions:	Two-side labeling: 30 - 200 x 30 - 120 x 30 - 300 mm (L x W x H) Wrap-around labeling: 20 - 100 x 30 - 250 mm (D x H)
Label dimensions:	Two-side labeling: 15 - 240 x 30 - 200 mm (W x L) Wrap-around labeling: 15 - 150 x 30 - 315 mm (W x L)
Capacity:	Up to 200 products/minute
Power supply:	400 V, TN-C-S, 50 Hz, 3 phases 208 V, Delta 4-wire, 60 Hz, 3 phases (optional)
Compressed air supply:	6 bar
Printer:	Various hot-foil and thermal transfer printers (optional)
Components:	Conveyor belt, side guides for products, top belt, applicators
Options:	Transfer plates at infeed and outfeed, belt-type separator, chain aligner, wrap-around labeling with wrap-around belt and counterpressure plate, movable version, wipe-down station, 3 rd applicator
Note:	If optional features are chosen, the above data may vary

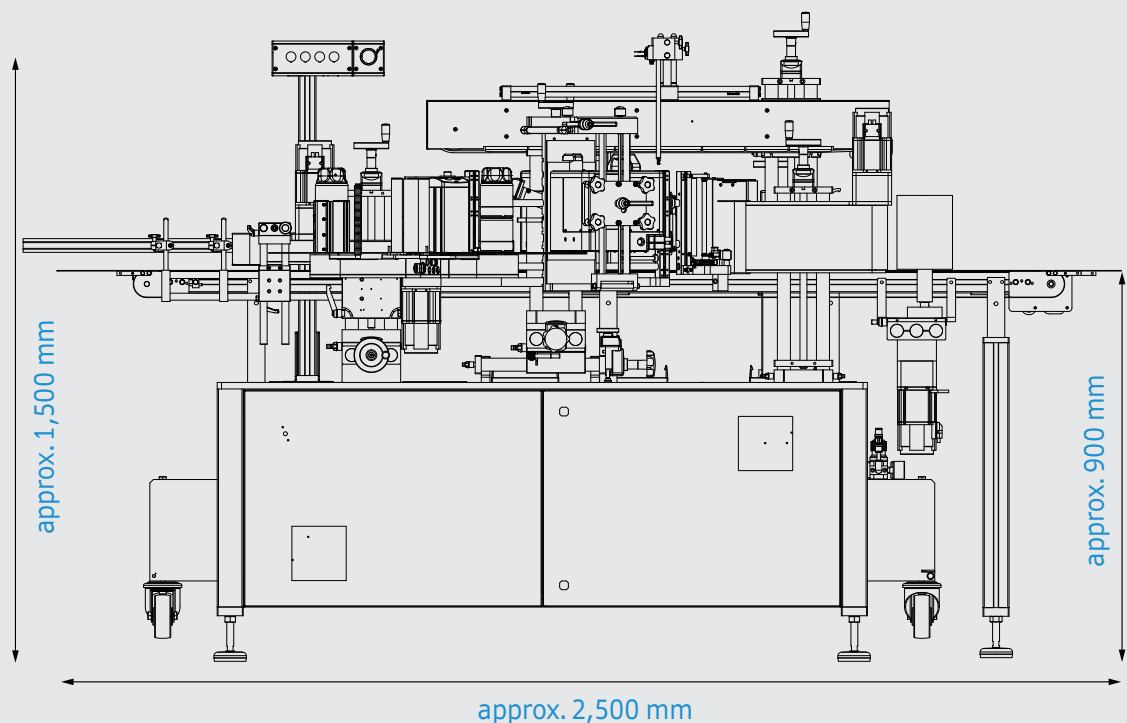

362C in video

HERMA GmbH
Labeling Machines Division
Heinrich-Hermann-Straße 14
70794 Filderstadt

Tel. +49 (0) 711 / 7702-2012
www.herma.com/machines
machines@herma.com