



Highlights

By choosing the new HERMA 500, you can expect top performance in every aspect. Highlights of this technological flagship include a touchscreen with an innovative menu navigation and state-of-the-art interfaces.

> For automatic label detection the FS03 sensor of HERMA senses the last label on the peel plate, thereby ensuring maximum precision.

Thanks to their modular design, the labeling machines are available at very short notice.







Technical data

Labeling type: Top labeling • bottom labeling • top & bottom labeling

Product specifications: Rectangular, dimensionally stable

Top labeling: 30 - 300 x 50 - 250 x 50 - 150 mm (L x W x H) Product dimensions:

> Bottom labeling: 140 - 300 x 50 - 250 x 50 - 200 mm (L x W x H) Top & bottom labeling: 140 - 300 x 50 - 250 x 50 - 150 mm (L x W x H)

Label dimensions: Top labeling: 15 - 160 x 30 - 300 mm (W x L)

Bottom labeling: 15 - 120 x 30 - 300 mm (W x L)

Capacity: Up to 250 products/minute Power supply: 230 V, 50 Hz, 1 Phase Compressed air supply: 6 bar (optional)

Printer: Various hot-foil printers (optional)

Components: Conveyor belt, side guide for products, applicator(s), control panel

Options: Transfer plates at infeed and outfeed, moveable version,

digital position indicators

If optional features are chosen, the above data may vary Note:





Useful options

If required, the machines are available as moveable versions, giving you the flexibility to place them exactly where they are needed.



A hot-foil printer can be easily integrated to allow for variable data printing.



The machines are available with various conveyor belt dimensions, making them suitable for a wide range of applications.


HERMA GmbH

Labeling Machines Division

Heinrich-Hermann-Straße 14 70794 Filderstadt

Tel. +49 (0) 711 / 7702-2012

www.herma.com/machines machines@herma.com

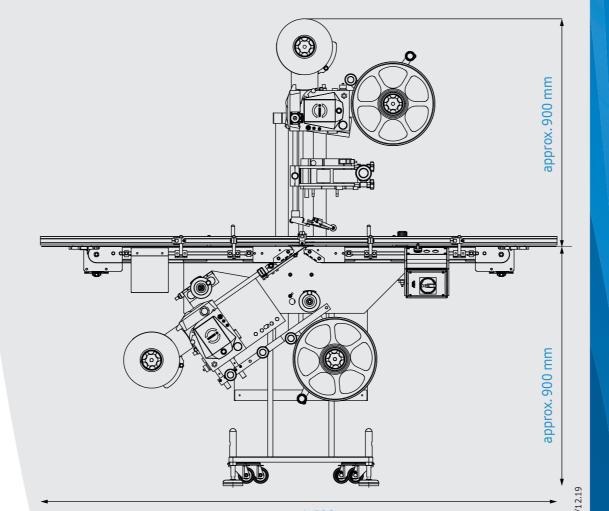

approx. 1,600 mm

Top & bottom labeling

You have the choice – we have three suitable solutions!

*** HERMA**

Top labeling

With the 452C, you will always come out on top



Bottom labeling

The 552C, the foundation for your success

In bottom labeling in particular, it is essential to minimize setup times with as little effort as possible.

The HERMA 500 can be easily adjusted to it's insertion and working position allowing for quick and convenient changeover of label reels. The conveyor belt ensures the label application so the turning of the products is no longer necessary.



552C on video

Top & bottom labeling

The 652C makes no compromises

